

Tap-Change AVR

Full Automatic & Electronic Voltage Regulator

- Flexible input utility voltage range
- Power efficiency more than 95%
- Output surge protection circuit
- Reliable IC chip design
- Output overload protection combined with recoverable manual circuit breaker
- Output short protection combine with recoverable manual circuit breaker
- Available for all kind of sensitive instruments
- Step by step status LED display
- Network signal protection circuit
- Telecom signal protection circuit




TCA-1200/2000VA




Complete Power Solution™

ISO 9001 Certified Company

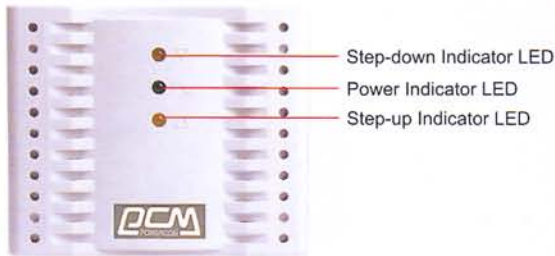

TCA-1200/2000

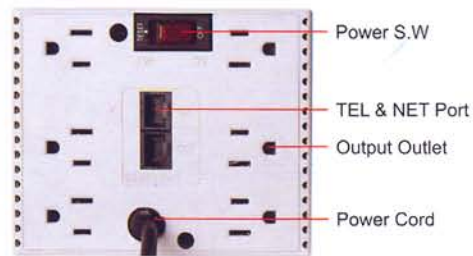

TCA-1200/2000

Specification

Model	TCA-1200	TCA-2000
Power rating	1200VA	2000VA
Power factor	0.5	
AC INPUT	Frequency	50Hz or 60Hz
	Phase	1 Phase 2 Wire
	Voltage range	(110V, 115V, 120V or 220V, 230V, 240V) +/-20%
	Amount Used	To smaller than 10W
AC OUTPUT	Frequency	50Hz or 60Hz
	Phase	1 Phase 2 Wire
	Voltage Regulation (AVR)	(110V, 115V, 120V or 220V, 230V, 240V) +/-7%
Efficiency	95%	
ENVIRONMENT	Operation Humidity	0% ~ 95% (Non Condensing)
	Operation temperature	0°C ~ 40°C
	Preserve temperature	-20°C ~ 55°C
	Preserve elevation	< 10000M
	Operation elevation	< 3500M
LED INDICATORS	Power ON	Green Color LED
	Stpe Power DOWN	Orange Color LED
	Stpe Power UP	Orange Color LED
PROTECTION	Over Load	Manual Reset Circuit Switch
	Short circuit	Manual Reset Circuit Switch
	Surge Protection	Varistor
	Internet communication	Option
	Data phone communication	Option
DIMENSION	W x D x H (mm)	123 x 136 x 102 (4.8" x 5.4" x 4.0")
NET WEIGHT	Kg (lb)	1.6 (3.52 lb) 1.8 (3.96 lb)

Available Through:



Complete Power Solution™

ISO 9001 Certified Company

